

# SPECIFICATION SHEET

## FFS4V | CHRISPER STATION

HEATED FRIED FOOD CABINET, 2 DOUBLE FLIP-UP DOORS, TOUCHSCREEN CONTROLS, PROGRAMMABLE MENU SETTINGS, REMOVEABLE WIRESHELF, HOLDS UP TO FOUR 18" X 26" STANDARD SHEET PANS , STAINLESS STEEL CONSTRUCTION.



FFS4V



The technical content of this manual, including any wiring diagrams, schematics, parts breakdown illustrations and/or adjustment procedures, is **intended for use by qualified technical personnel** and is subject to change without notice.

**This appliance is intended to be used for commercial applications, for example, in kitchens of restaurants, canteens, hospitals and in commercial enterprises such as bakeries, butcheries, etc., but not for continuous mass production of food.**



|                     |                   |
|---------------------|-------------------|
| <b>Project</b>      |                   |
| <b>Item No.</b>     |                   |
| <b>Notes</b>        |                   |
| <b>Model Number</b> | <b>FFS4V-25T1</b> |

## FEATURES & BENEFITS

|   |  |
|---|--|
| INSULATED STAINLESS STEEL CONSTRUCTION TWO DOUBLE FLIP-UP DOORS | FLIP-UP DOORS STAY OPEN FOR EASY LOADING AND PRODUCT RETRIEVAL     |
| PRECISION-ENGINEERED HEAT DUCTS WITH A SINGLE FAN AND MOTOR     | EVEN HEAT DISTRIBUTION THROUGHOUT                                  |
| PROGRAMMABLE TOUCHSCREEN CONTROLLER WITH MULTIPLE MENU SETTINGS | EACH SHELF CAN BE PROGRAMMED FOR A DIFFERENT MENU ITEM             |
| TWO SETS OF REMOVEABLE WIRESHELVES                              | HOLDS UP TO FOUR 18" X 26" STANDARD SHEET PANS (PANS NOT INCLUDED) |

## CLEARANCES

The front and rear must remain open and unobstructed. Allow at least 15" of pan clearance on front and rear of cabinet. Allow at least 2" for the power cord at the top of the cabinet and ventilation gap at the top, sides, and rear of cabinet if not using a pass-through design. Do not place anything on the top of the cabinet. Cabinet must be placed on noncombustible surface.

## CONFIGURATIONS

| Model Number     | Electrical Characteristics |       | Connectware | 4 Shelves and 2 Doors |
|------------------|----------------------------|-------|-------------|-----------------------|
|                  | Hz                         | Volts |             |                       |
| FFS4V-25T1AGEN   | 60                         | 208   | ×           |                       |
| FFS4V-25T1BGEN   | 60                         | 208   | ✓           |                       |
| FFS4V-25T1CGEN   | 50                         | 230   | ×           |                       |
| FFS4V-25T1DGEN † | 50                         | 230   | ✓           |                       |
| FFS4V-25T1EGEN † | 60                         | 240   | ×           |                       |
| FFS4V-25T1FGEN † | 60                         | 240   | ✓           |                       |
| FFS4V-25T1GGEN‡  | 50                         | 230   | ×           |                       |
| FFS4V-25T1HGEN‡  | 50                         | 230   | ✓           |                       |
| FFS4V-25T1IGEN*  | 60                         | 230   | ×           |                       |
| FFS4V-25T1JGEN*  | 60                         | 230   | ✓           |                       |

NEMA 6-20P with six foot 14/3 power cord  
 † Compatible with ±5% voltage range.  
 ‡ IECEE CB Scheme Compliant  
 \*Saudi Arabia – General Market  
 \*\*Popeyes unit designed specifically for Popeyes

| Model Number | Electrical Characteristics |       | Description |       |
|--------------|----------------------------|-------|-------------|-------|
|              | Hz                         | Volts | Shelf       | Doors |
| FFS4V-25T1   | 60                         | 208   | 3           | 1     |

NEMA 6-20P with six foot 14/3 power cord

| Model Number | SHELF CLEARANCE in (mm) | UNIT OVERALL DIMENSIONS |               |               | Product Weight lbs(kg) |
|--------------|-------------------------|-------------------------|---------------|---------------|------------------------|
|              |                         | HEIGHT in (mm)          | DEPTH in (mm) | WIDTH in (mm) |                        |
| FFS4V-25T1   | 5 (127)                 | 42 (1061)               | 37 (924)      | 25 (627)      | 197 (90)               |

## TOUCHSCREEN CONTROLLER

Intuitive touchscreen interface with programmable recipes with adjustable temperature settings and individual pan timers; front access USB port. Factory default set point temperature at 170°F (76°C) and preheats within 30 mins.

## WARRANTY

ONE YEAR LABOR PARTS & LABOR LIMITED WARRANTY



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE FOR PRODUCT IMPROVEMENT AND INNOVATION

CARTER-HOFFMANN

KCL & REVIT DRAWINGS UPON REQUEST

1551 MCCORMICK AVENUE, MUNDELEIN, ILLINOIS 60060

847.362.5500 | 800.323.9793


REVISION 2: 02/09/2026

WWW.CARTER-HOFFMANN.COM



|              |            |
|--------------|------------|
| Project      |            |
| Item No.     |            |
| Notes        |            |
| Model Number | FFS4V-25T1 |

## DRAWINGS

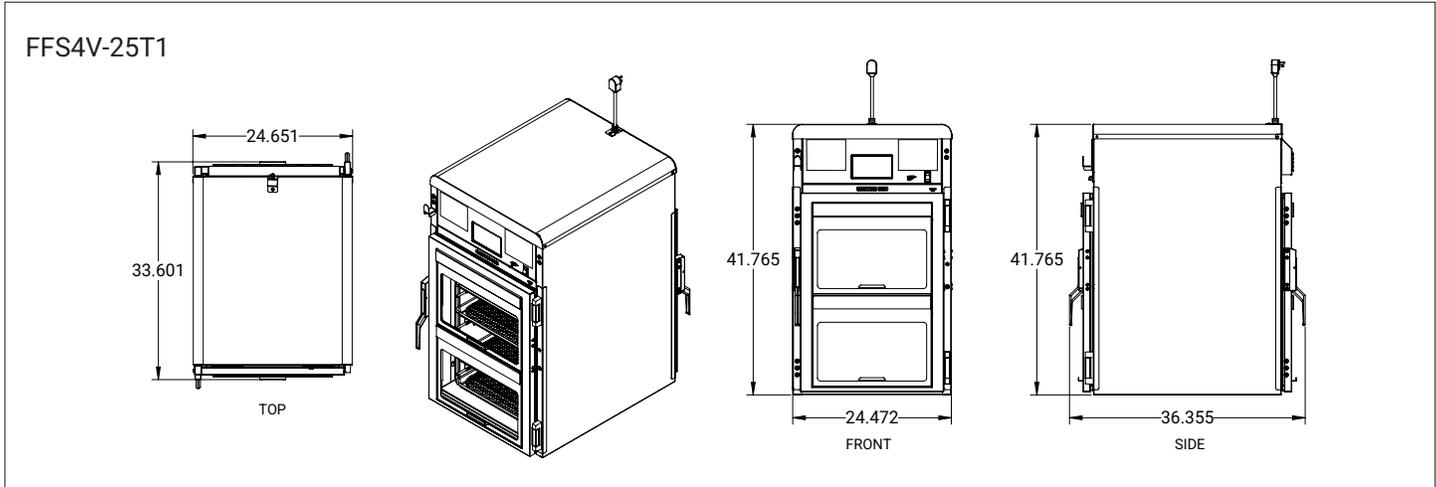

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE FOR PRODUCT IMPROVEMENT AND INNOVATION

CARTER-HOFFMANN

KCL & REVIT DRAWINGS UPON REQUEST

1551 MCCORMICK AVENUE, MUNDELEIN, ILLINOIS 60060

847.362.5500 | 800.323.9793

REVISION 2: 02/09/2026

WWW.CARTER-HOFFMANN.COM