



Item: _____

Quantity: _____

Project: _____

Delux Series

Models: ORSU-212 ORSU-424 ORSU-636 ORSU-848



ORSU-636

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Features



- Fully welded frame with lifetime warranty
- 10" high, low profile
- Heavy 3/8" thick plate with 9 3/4" stainless steel wok ring or heavy cast iron 12" x 12" top grates with unique bowl design
- Rear burners elevated 4"
- Full width, removable stainless steel crumb pan for easy cleaning
- Stainless steel sides, front valve cover and ledge for easy cleaning
- Double wall panels for cooler sides
- Cast iron burners rated at 30,000 BTU/hr each featuring removable, non-clog lift off heads with flat top design
- Protected standing pilots for instant ignition
- Manual control for each burner
- Stainless steel tubing for pilots
- 4" high adjustable heavy duty legs included

Options and Accessories



LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR

Step Up Original Flex System

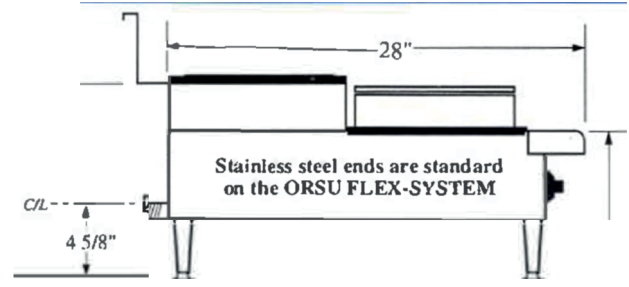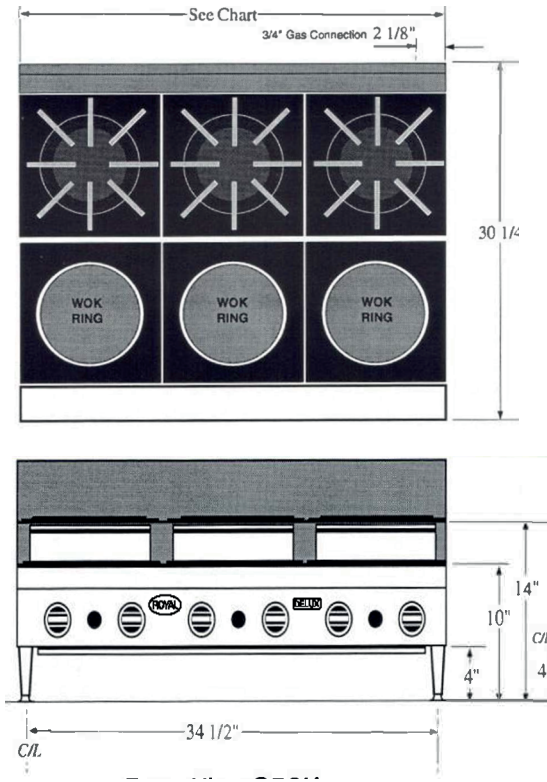

Model Number	Width (A)	Depth	Number of Burners	Total BTU	Ship Weight
ORSU-212	12"	31 1/2"	2	60,000	82 lbs.
ORSU-424	24"	31 1/2"	4	120,000	144 lbs.
ORSU-636	36"	31 1/2"	6	180,000	224 lbs.
ORSU-848	48"	31 1/2"	8	240,000	292 lbs.

Notes:

- Each burner is rated at 30,000 BTU/hr

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Clearances:

	Combustible	Non-Combustible
Rear	4"	0"
Sides	15"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com