



Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

## Royal Series

Models:  RR-6C



RR-6C

Gas Type:  Natural  LP

Elevation (if above 2000 ft.): \_\_\_\_\_

### Standard Features

- All stainless steel burner box
- Stainless steel front, sides, valve cover, and kick plate including backguard and high shelf
- Convection Oven base
- Stainless steel drip tray
- Thermostat adjustable from 150° to 500°
- Stainless Steel oven "U" burner rated at 30,000 BTU/hr
- Pilot only on when the power is turned on
- Oven pilot with 100% safety shut down
- Two piece, heavy duty lift off cast iron burner heads rated at 30,000 BTU/hr
- 12" x 12" cast iron top grates with pilot shield
- Five position heavy gauge chrome rack guides
- Three chrome rack per oven
- Five surface porcelain oven interior
- Stainless steel tubing for burners and pilots


### Options and Accessories

- 6" high S/S stub back in lieu of high shelf
- 1" thick griddle plate
- Griddle on right (Left hand side standard)
- Chrome griddle plate
- Grooved griddle (specify width: \_\_\_\_\_")
- One thermostat per burner (GT Griddle Series)
- 12" hot top section - add suffix "-HT"
- 9" deep S/S front landing ledge, with or without sauce pan cutouts
- Additional oven racks
- Open storage cabinet base - add suffix "-XB"
- Cabinet doors
- Intermediate shelf
- Wok burner head with 10" diameter S/S ring
- 48" quick disconnect and restraining cable
- 5" swivel casters (set of four - 2 locking)



**LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR**

# 36" Gas Convection Oven Range

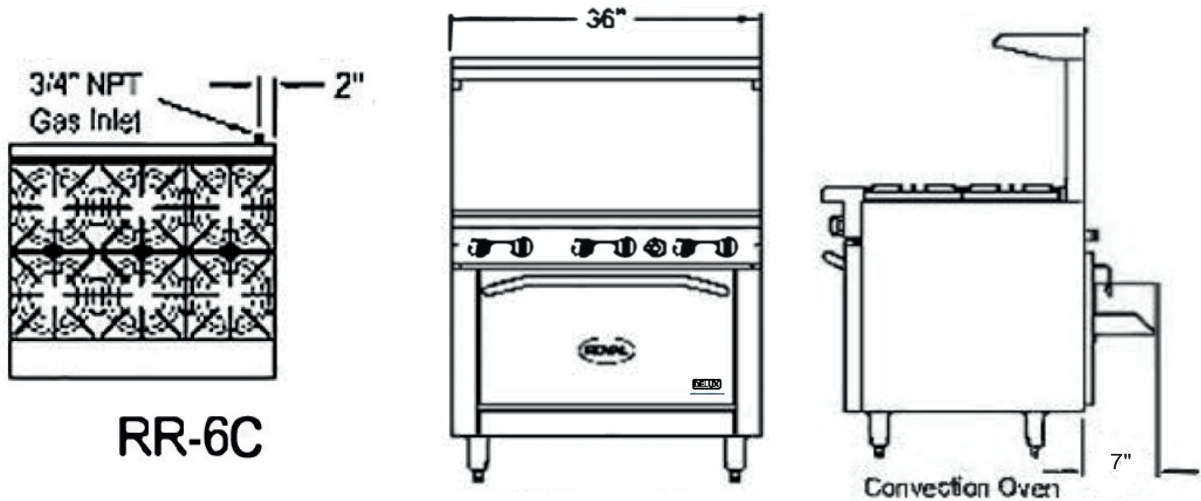

Model Number	Open Burners	Total BTU	Ship Weight
RR-6C	6	210,000	600 lbs.

**Notes:**

- Convection Oven (30,000 BTU/hr)

**Gas Connection:**

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

**Electrical Requirements:**

Convection Oven: 120 V, 50/60hz, 1 Ph., 8 amps

Two speed motor (1725/1140 RPM) 1/2 HP

Provided with 6' power cord fitted with a standard three prong grounded plug.

**Gas Pressure:**

5" W.C.	Natural Gas
10" W.C.	Propane

**Clearances:**

	Combustible	Non-Combustible
Rear	4"	0"
Sides	15"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

**Royal Range of California**  
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600  
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com