



Item: _____

Quantity: _____

Project: _____

Solid State Thermostatic Griddle

Delux Series

Models: RD85-24-SAE RD85-36-SAE RD85-48-SAE RD85-60-SAE
 RD85-60-SAE



RD85-36-SAE

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Features

- Fully welded frame with lifetime warranty
- Solid state controller with embedded sensor adjustable from 150°-450° F
- Pilot safety and electronic ignition
- 1" thick griddle plate with polished cooking surface
- 24" deep cooking surface
- Stainless steel front and sides
- Aeration panels between the burners for added efficiency
- Burner "on" indicator lights
- Burner every 12", rated at 32,000 BTU/hr
- Large capacity stainless steel grease can (2 on 48" and above)
- Thermostatic control every 12"
- 4" high adjustable heavy duty legs included


Options and Accessories

- Grooved griddle (specify width: _____")
 - Chrome griddle plate
 - Rear gutter in lieu of front gutter
 - Cutting board
 - Plate shelf
 - Stainless Steel Equipment Stand
 - Knock Down All Welded
- Size
- 12" 18" 24" 30" 36" 48" 60" 72"
 - 5" swivel casters (set of four - 2 locking)
 - 5" swivel casters (set of four - 2 locking) (60" and 72" stands)



LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR

Solid State Thermostatic Griddle

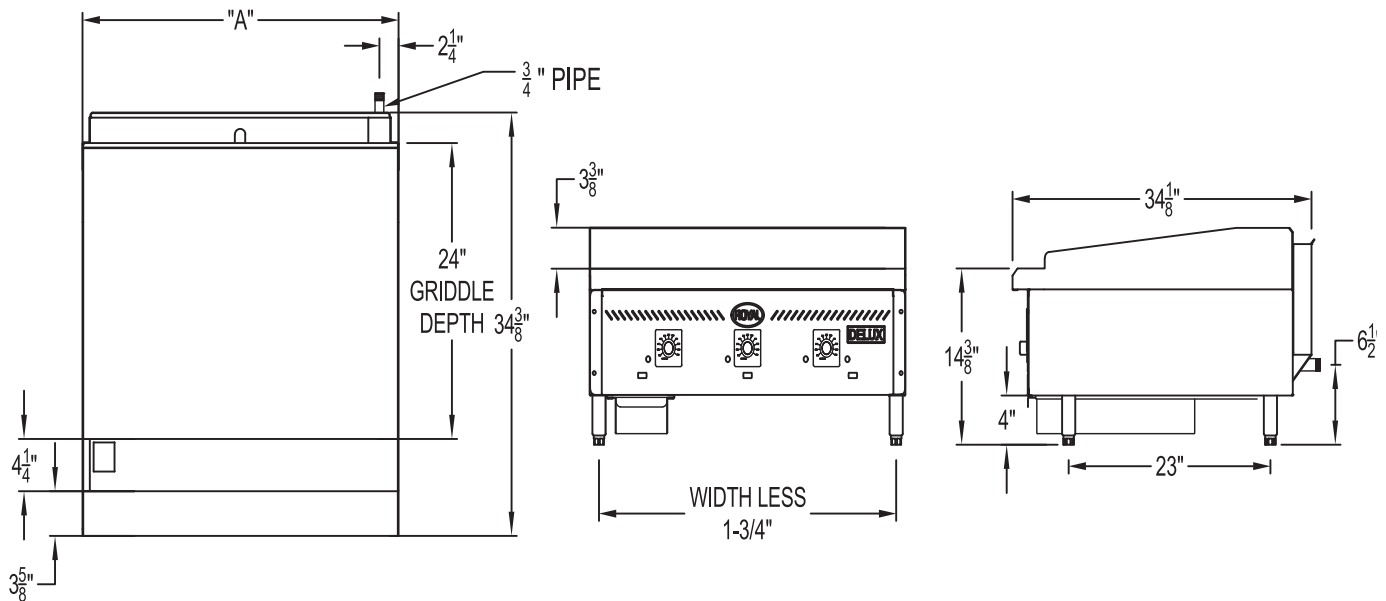

| Model Number | Width (A) | Number of Thermostats | Number of Burners | Total BTU | Ship Weight |
|--------------|-----------|-----------------------|-------------------|-----------|-------------|
| RD85-24-SAE | 24" | 2 | 2 | 64,000 | 285 lbs. |
| RD85-36-SAE | 36" | 3 | 3 | 96,000 | 395 lbs. |
| RD85-48-SAE | 48" | 4 | 4 | 128,000 | 539 lbs. |
| RD85-60-SAE | 60" | 5 | 5 | 160,000 | 652 lbs. |
| RD85-72-SAE | 72" | 6 | 6 | 192,000 | 786 lbs. |

Notes:

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Electrical: 120V, 60Hz, 1 phase, 1 amp

Provided with 6' power cord fitted with standard 3 prong grounded plug

Gas Pressure:

| | |
|----------|-------------|
| 5" W.C. | Natural Gas |
| 10" W.C. | Propane |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 6" | 0" |
| Sides | 4" | 0" |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com