



# LEONARDO 370 EVO BS2 TOP - 15"

*Full-size, straight-feed slicer, for cured meats*



**Leonardo 370 EVO BS TOP**

- 15" high-quality, heavy-duty straight-feed cooked meat slicers
- Designed for precise slicing of all kinds of cooked and cured meats
- Fitted with a double-feed carriage with a double articulating clamping arm holding any product firmly in place
- The TOP version provides even higher durability in terms of reduced maintenance costs with:
  - all knobs, handles, dials and feet in aluminum
  - a fully sealed and waterproof IP 67 switch, with stainless steel on/off buttons
  - no volt release prevents inadvertent reactivation after a power outage
  - complete stainless steel drive shaft assembly

## Features

### Technical

- The special carriage allows you to slice any kind of cured meat.
- The sharpener assembly is made entirely from aluminum, no plastic that may break with heavy use.
- The tie rod assembly and all screws are made of stainless steel for longer life.
- The slide shaft is made of ground, chromed steel for a smoother operation.
- The high-quality bushings and ball bearings are self-lubricating.
- The dial thickness control cam system allows for an always precise cut.

### Safety

- A safety cover is placed under the motor and the electrical components.

### Sanitary

- Easy to clean aluminum alloy construction does not crack or stain.
- The screws are stainless steel and resist wear and oxidation.
- The carriage and the center plate are quickly removable without tools.

## Specifications

### Operation:

Straight Feed.

### Construction:

Polished, anodized aluminum alloy.

### Knife 350:

15" (370 mm), one piece, chromium plated 100Cr6 forged carbon steel blade.

### Sharpener:

Built-in, removable, two stone dual action.

### Slice thickness:

Infinitely variable up to  $1\frac{3}{16}$ ".

### Motor:

1/2 Hp (410 W), belt driven, fan cooled.

### Electrical:

120V AC, 60Hz, 3.10 Amp. (220V, 50Hz available on request).

### Plug and Cord:

Attached, flexible, 3 wire SJT AWG 16, 64" long, NEMA 5-15P.

### Controls:

ON/OFF stainless steel keypad, IP 67 waterproof protection.

No voltage release.



SIRMAN USA, Inc. 9490 Franklin Avenue Franklin Park, IL 60131 U.S.A.

Phone: +1 847-288-9500

Toll free: 866-643-6872

sirmanusa@sirman.com

www.sirman.com



Removable end weight pusher



Increased gap between blade and machine body



Reduced gap between blade and end weight




Adjustable aluminum feet



Dual-stage cam allows precise thin and thick slicing



Stainless steel slice deflector

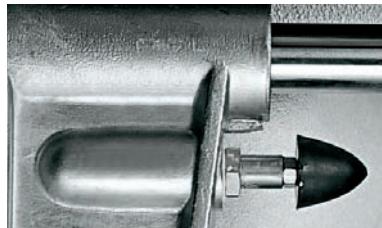




Carriage buffer



Built-in sharpener



Sealed electrical enclosure

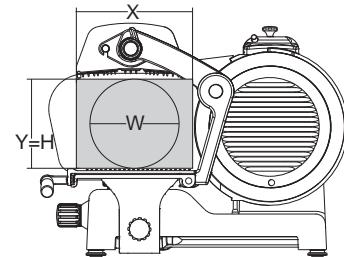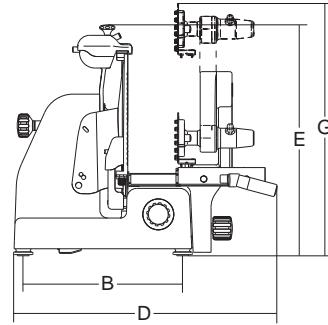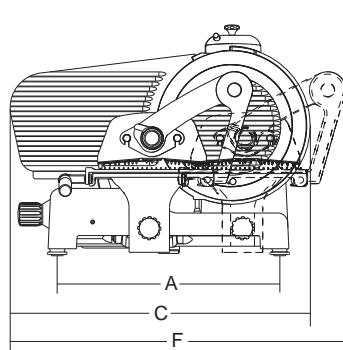

Ø Blade	Motor	Cut thickness	Blade rpm	Carriage stroke	Hopper	A	B	C	D	E	F	G	X	Y	H	W	Net weight	Shipping	Gross weight
mm/inch	watt/Hp	inch.	rpm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.	
<b>Leonardo 385 EVO BS TOP</b>	385/15"	410-0,55	1"	216	14 <sup>9/16</sup> "	13 <sup>25/32</sup> " x 12 <sup>19/32</sup> "	22 <sup>14/64</sup> "	16 <sup>9/64</sup> "	30 <sup>5/16</sup> "	29 <sup>17/32</sup> "	24 <sup>13/32</sup> "	35 <sup>7/16</sup> "	26 <sup>3/8</sup> "	13"	11 <sup>7/32</sup> "	11 <sup>7/32</sup> "	130	33" x 34" x 33"	165