



Specifications

F.O.B Sedalia, Missouri 65301



WB303

OPTIONS:

- ☐ Cold pan style top
- ☐ Drop type brackets for cutting board
- ☐ Stainless steel feet
- ☐ Adapter plates
- ☐ Stainless steel dish shelf under cutting board
- ☐ Trayslides & Workshelves
- ☐ Foodshields

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

SS-DM-0002-AFS-03

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Aerohot™ Foodservice

Hot Food Units - Electric

- | | |
|---------------------------------------|----------------|
| ☐ WB302 | 2 top openings |
| ☐ WB303 | 3 top openings |
| ☐ WB304 | 4 top openings |
| ☐ WB305 | 5 top openings |

TOP:

- 20 gauge, stainless steel
- Die-stamped openings - 12" x 20"
- Poly carving board - 7"W x 1/2" thick with 18 gauge stainless steel support shelf and die-stamped brackets

LINER:

- 18 gauge, stainless steel - 8" deep
- 1" cast brass drain and valve in wet bath

BODY AND INTERIOR SHELF:

- 20 gauge, 430 Series stainless steel body
- 20 gauge, 430 Series stainless steel undershelf
- 430 Series stainless steel tubular legs with adjustable plastic feet

CONTROLS:

- Natural or Propane, as specified
- Gas safety pilots standard
- Gas pressure regulator furnished in each unit
- Burners controlled by adjustable valve


SHORT FORM SPECIFICATIONS:

Aerohot™ Foodservice - Hot Food - Gas Wet Bath. Heavy gauge tops w/ 430 series s/s body, under shelf and legs of heavy gauge 430 series s/s, open water bath w/adjustable gas valve control & safety point, 12"x 20", s/s top w/1/2" thick x 7" wide poly carving board, s/s open base w/under shelf, legs & feet. Unit shipped knocked down.


NOTE: Not available on casters

SPECIFY NATURAL OR PROPANE


Aerohot®

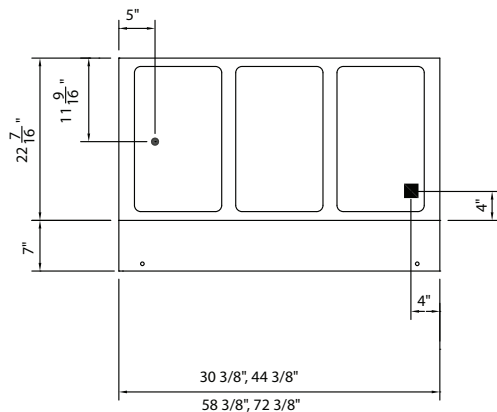

TOP VIEW

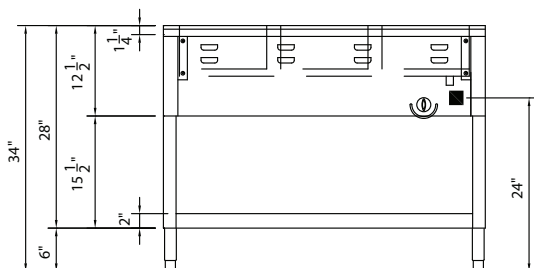

FRONT VIEW



RIGHT SIDE VIEW

MODEL:**Aerohot™ Foodservice****Hot Food Units - Gas Wet Bath**

- ☐ **WB302** 2 top openings
- ☐ **WB303** 3 top openings
- ☐ **WB304** 4 top openings
- ☐ **WB305** 5 top openings

LEGEND

■ - GAS CONNECTION

● - DRAIN CONNECTION - 1" cast brass

DIMENSIONS:

Freight Class: 85

Model	Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm			lbs	kg
WB302	30-3/8	77.2	22-7/16	57.1	34	86.4	2	27.0	110	49.9
WB303	44-3/8	112.8	22-7/16	57.1	34	86.4	3	38.1	135	61.2
WB304	58-3/8	148.3	22-7/16	57.1	34	86.4	4	49.2	160	72.6
WB305	72-3/8	183.9	22-7/16	57.1	34	86.4	5	60.2	195	88.4

POWER SUPPLY: High altitude orifice available
- specify elevation. **SPECIFY NATURAL OR PROPANE.** 1/2" connection

Model	Total BTU
WB302	15,000
WB303	15,000
WB304	27,500
WB305	27,500

NOTE: No combustible materials should be stored on bottom shelf. NOT AVAILABLE IN PORTABLE MODELS. No provisions shall be made for overshelves or trayslides to be mounted.

**DUKE MANUFACTURING CO.**

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

06/15
Printed in U.S.A
© 2015, Duke Manufacturing Co.