

Project: \_\_\_\_\_  
 Model #: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Approval: \_\_\_\_\_

460 Southport Commerce Blvd.  
 Spartanburg SC 29306  
 Phone: 864-574-6004  
 Toll Free: 1-888-532-2816  
 sales@ojedausainc.com  
 service@ojedausainc.com  
 www.ojedausa.com



# OPEN AIR MERCHANDISER ALPA-77H SLIM



Custom Graphics  
 Available Upon Request

### CARE FREE CONDENSER

The finless spiral condenser design prevents dust/dirt buildup allowing maximum long term efficiency.

### R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

### STEEL CONSTRUCTION

Robust steel construction minimizes the use of plastic materials resulting in an environmentally friendly design.

### 120 VOLT SYSTEM

All Alpa models feature a 110/120 Volt system standard, ensuring hassle-free plug and play for our customers.

### ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

### LED LIGHTING

LED provides long lasting energy efficient lighting with minimal heat output.

### HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

### NIGHT CURTAIN

30% less energy consumption when closed.

### OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

Dimensions			Shelves	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
36.3"	23.1"	80.2"	5	5/8	120	5-15P	10	512 lbs	R-290
922 mm	587 mm	2037 mm	Net Capacity (cf): 9		Energy Consumption: 14.75 kWh/24 h				

\*Inches rounded up one decimal place. \*Specifics may change without notification.

# OPEN AIR MERCHANDISER

# ALPA-77H SLIM

## CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- Large low-E double pane tempered thermal glass panels.
- Manual retractable night curtain for increased energy savings.
- Exterior: Galvanized metal cabinet with powder coated painted surface.
- Interior: Easy to clean pre-painted steel.

## SHELVING

- 5 adjustable dual-position shelves with tag molding.
- Dimensions per shelf: 31" W x 12" D.

## OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- Open Air models should not be installed in any area where the air curtain will be disrupted. This includes placement near any HVAC vent, open doorway, fan or areas with direct sunlight.

## ELECTRICAL

- 110/120 standard volt system.



## LIGHTING

- LED interior lighting.

## REFRIGERATION

- R-290 refrigerant.
- Maintenance free condenser.
- Hot gas heated condensation pan.
- Electronic temperature control.
- Automatic defrost cycle.
- Easy to reach components for maintenance.

## ACCESSORIES

- 3" or 5" casters.
- 6" stainless steel legs.
- Bumper bar.
- Clearcool curtain.
- Custom graphics.
- Front product merchandiser.
- Glass doors.
- Lockable security cage.
- Peg bar system for hanging product.
- Shelf product retainers.
- Side product merchandiser.

## OPTIONAL ACCESSORIES


### 3"/5" CASTERS



### GLASS DOORS



## DIMENSIONAL DRAWING

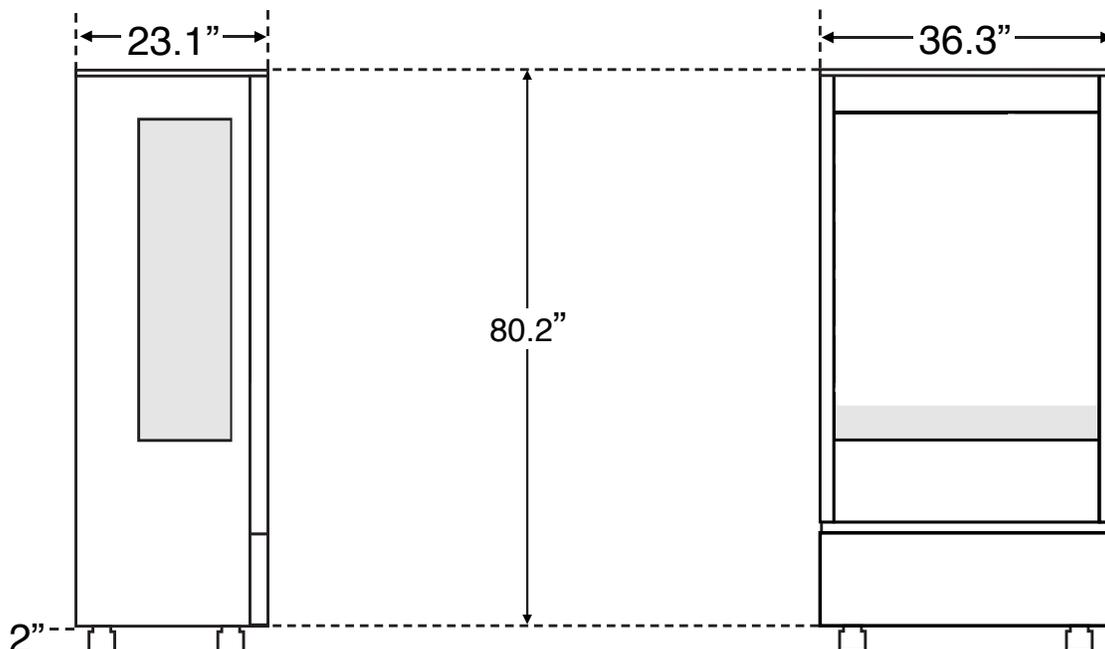

\*Inches rounded up one decimal place. \*Specifics may change without notification.



[www.ojedausa.com](http://www.ojedausa.com)