



BEVERAGE-AIR

| | |
|-----------------|------|
| Project: _____ | AIA# |
| Item: _____ | |
| Location: _____ | SIS# |
| Approved: _____ | |

DD24HC DIRECT DRAW DISPENSER

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

**MODEL:
DD24HC-1-B**

DD24HC Solid Door Single Tower With Faucet
Hydrocarbon Series



**5 Year Parts/Labor Warranty Available
7 Year Compressor Warranty**

CABINET CONSTRUCTION

- Exterior features durable black painted steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsill are heavy-duty stainless steel
- Mechanical control
- Single tower with faucet
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Four-inch (4") heavy duty casters standard
- Door lock
- Self-closing door with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible door (hinge kit not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel interior lining
- Stainless steel back
- Wine/coffee models
- Glass door
- Faucet locks
- Glass rinser
- Right or left hinged door
- Sub-top
- No draft arm/hole cover
- 1- 4 Tap tower
- 2, 3 & 4 way manifolds
- Dial/digital thermometer

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F




Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR

Bar Equipment-Direct Draw Beer Dispenser Model: DD24HC-1-B


| MODEL | DD24HC-1-B |
|--------------------------------------|--------------------|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 24" |
| Depth Overall | 30 1/8" |
| Height Overall (floor to top of tap) | 53" |
| Number of Doors | 1 |
| Depth with Door Open 90° | 50 3/4" |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 7.66 |
| Internal Width Overall (in) | 20" |
| Internal Depth Overall (in) | 22 1/4" |
| Internal Height Overall (in) | 23 1/2" |
| Number of 1/2 Kegs | 1 |
| ELECTRICAL DATA | |
| Full Load Amperes | 2.0 |
| REFRIGERATION DATA | |
| Horsepower | 1/6 |
| Capacity (BTU/Hr) | 1094 |
| Heat Rejection (BTU/Hr) | 1641 |
| Charge (lbs/grams/ounces) | 0.1213 / 55 / 1.94 |
| SHIPPING DATA | |
| Gross Weight - Crated | 174 lbs |
| Height - Crated | 46" |
| Width - Crated | 32" |
| Depth - Crated | 27" |

*NOTE: Refrigerant must be specified at time of order.


| KEG CAPACITIES: BM23 / DD24 / DD36 | | | |
|------------------------------------|-------------|-------------------------|--------------|
| | | | |
| 1 x 1/2 std. keg | 4 x 1/6 keg | 2 x 1/6 1 x 1/4 slim | 2 x 1/4 slim |

Model Views


Required Clearance: 5 1/8" bottom



PLAN VIEW

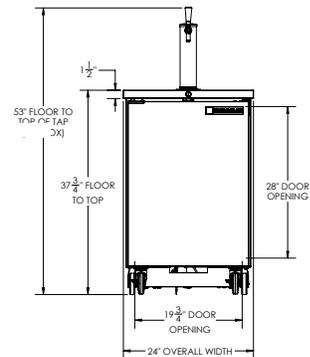

ELEVATION VIEW

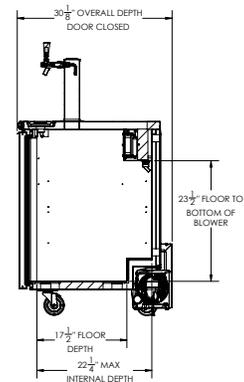

SIDE VIEW

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

