



## REACH-IN BOTTOM-MOUNT SERIES REFRIGERATORS

ikon  
series



### › FEATURES

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 3 adjustable, heavy-duty epoxy coated wire shelves per door
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Easy to mount 4" casters (lockable in front) are standard with all units
- Locking doors on all units. KB27R door swing is field reversible
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel, door & front panel: 202 stainless steel.
- Interior: 304 stainless steel
- Temperature: 33 to 41°F / 0.5 to 5°C
- Electrical: 115/60/1 with NEMA 5-15P plug

Warranty: 2 year parts and & labor, additional three years on compressor

### › SPECIFICATIONS

MODEL	DOORS	EXT. DIMENSIONS W x D x H (in)	INT. DIMENSIONS W x D x H (in)	AMPS	H.P.	SHIP WEIGHT
KB27R *	1	26.8 x 32.7 x 82.3	22.2 x 27.6 x 50.2	6	3/8	307 lbs
KB54R *	2	53.9 x 32.7 x 82.3	49.4 x 27.6 x 50.2	9	1/2	490 lbs
KB81R	3	81.0 x 32.7 x 82.3	76.4 x 27.6 x 50.2	10	3/4	598 lbs


CERTIFIED TO ANSI/NSF-7 STANDARDS



**Head Office :** 5659 Royalmount Ave., Montreal, Qc, Canada H4P 2P9  
TEL: (514) 737-9701 • TOLL FREE: (888) 275-4538  
FAX: (514) 342-3854 • TOLL FREE FAX: (877) 453-8832

**US Sales Office :** 12000 Biscayne Blvd, Suite 108, Miami, FL 33181  
TEL: (786) 600-4687 • TOLL FREE: (844) 218-8477 • FAX: (786) 661-4100  
mvpgroupcorp.com • sales@mvpgroupcorp.com



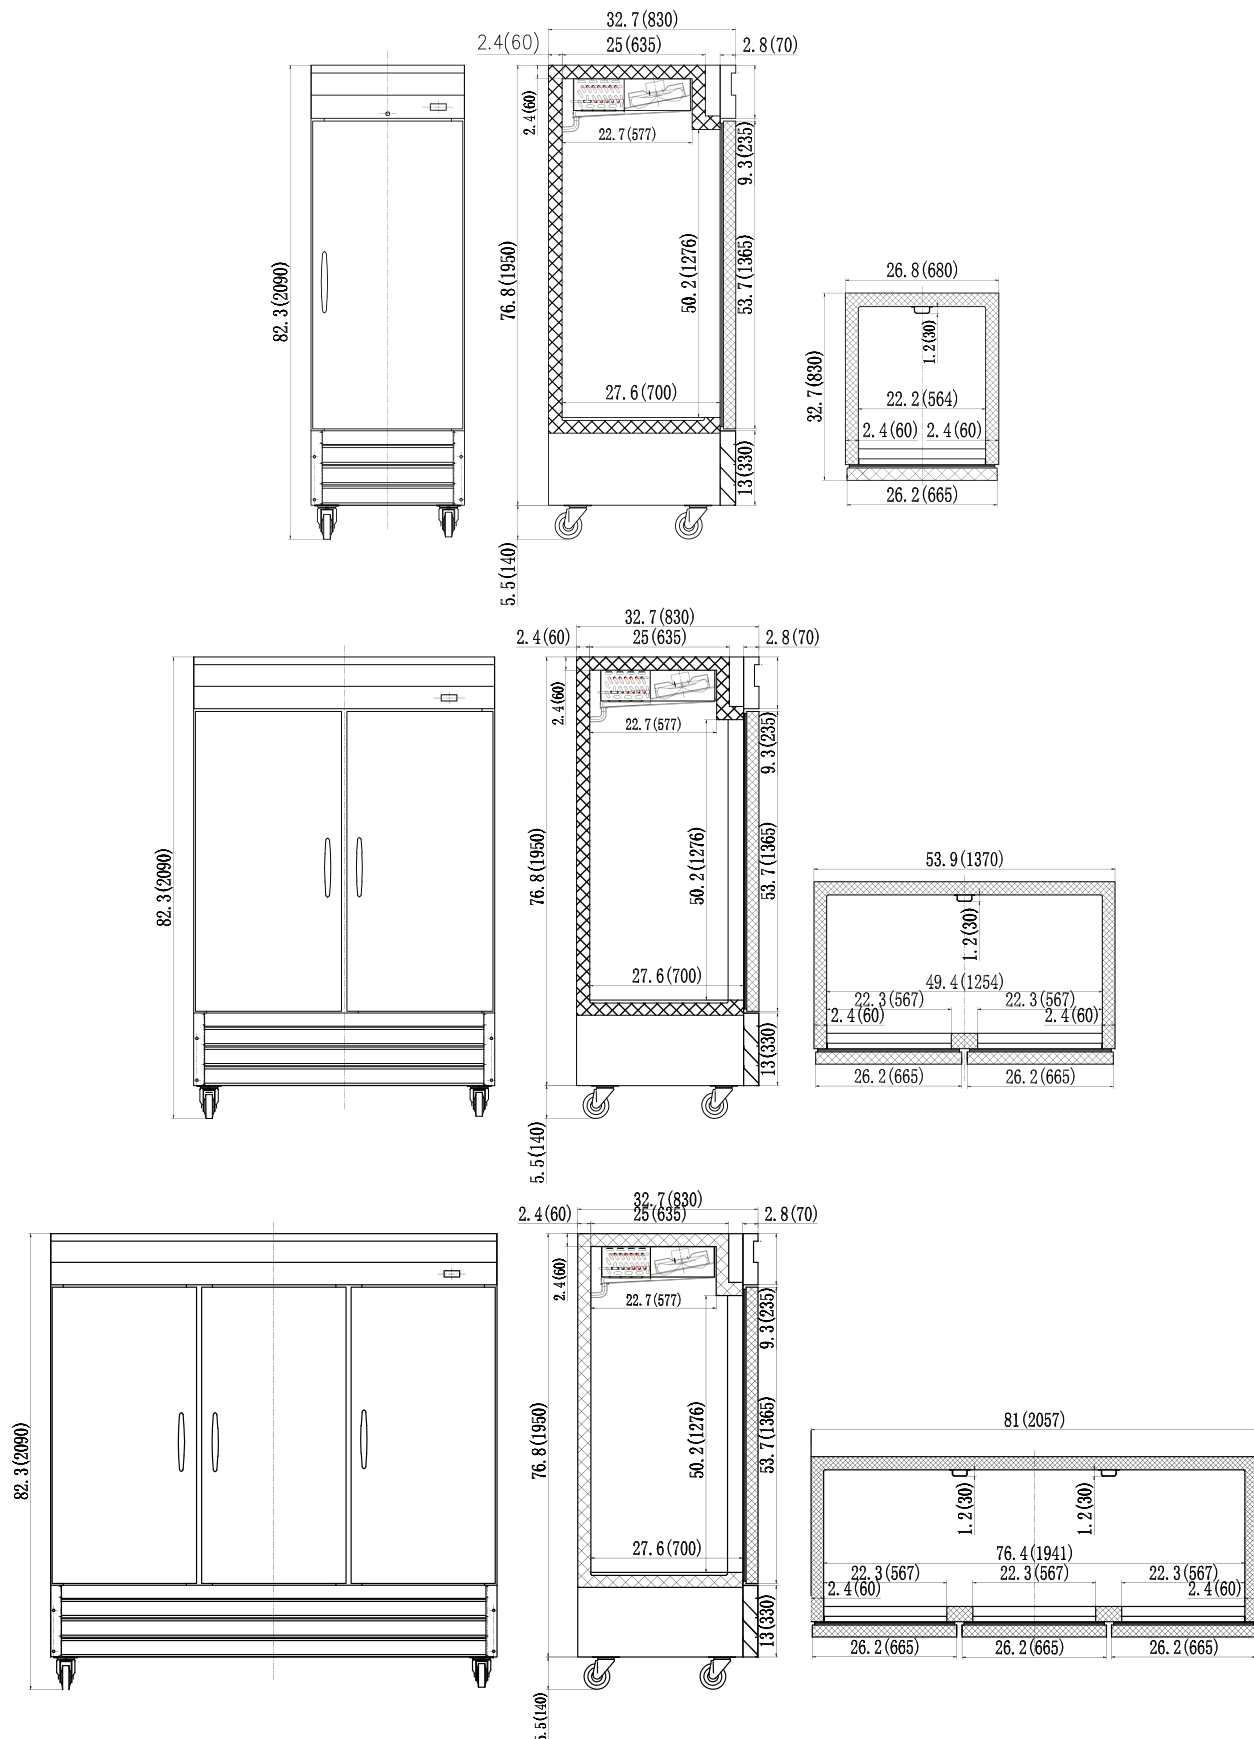

Dimensions in inches (mm)