

# PROFESSIONAL MEAT BAND SAW



Power, speed and efficient, all you need in one machine


### MODEL: *KSP-116*

- Removable Blade cleaners system
- Easy slide moving table system
- Easy to disassemble for easy cleaning without tools








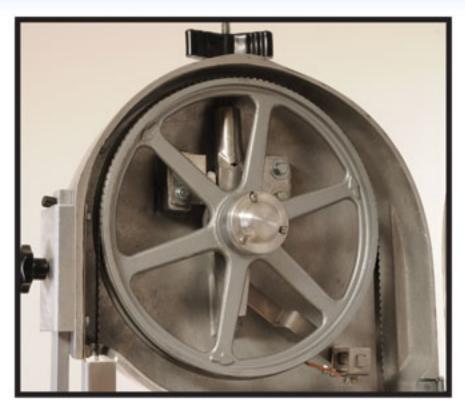



# TENSIONING SYSTEM EASILY ADJUSTABLE

Assures a proper blade tension for a clean cut and a long lasting blade life. It has a red mark on the upper wheel to indicate the correct blade tension.




The PRO-CUT easy slide systemallows a precise moving table ride, reducing effort and increasing productivity.

STAILESS STEEL ROLLERS

#### CONSISTENCY ON CUTS

The scale thick gauge slides slides easily to adjust the thickness on cuts, providing assistance to achieve more consistency on cuts.



the balanced wheels provide a vibration free operation, and a positive grip profile on the border of the wheels assures a steady blade drive for a perfect cut, while protecting the blade teeth.

#### SPECIFICATIONS:

MODEL	KSP-116
SAW LENGTH	295 cm/116"
BLADE SPEED	16 m/seg
THROAT WIDTH	35 cm/13.5"
THROAT HEIGHT	42 cm /16.5"
THERMOMAGNETIC SWITCHES	YES
WASTE TRAY	YES
MOVABLE BLADE GUARD	YES
SEALED OFF BEARINGS	YES
LEVELING FEET	YES
MOTOR	1.5 hp / 1.1 kw
VOLTS	120V
FRECUENCY	60 hz.
NET WEIGHT	164 kg / 362 lb
SHIPPING WEIGHT	215 kg / 475 lb

#### **EASY TO DISMANTLE**

Main components are easly disassembled (without tools) for cleaning and sanitizing, replaced without the need to disassemble any of the components.



#### REMOVABLE WHEEL AND BLADE CLEANERS SYSTEM

To keep wheel and blade, grease and waste-free.



#### **WASTE TRAY**

Collects waste to keep working area clean.



# CO CO

## THERMOMAGNETIC SWITCHES


Protects the motor against overloads and is easily activated.



#### THUMB PROTECTOR

The sliding table features a thumb protector for safety operation.

#### **DIMENSIONS**

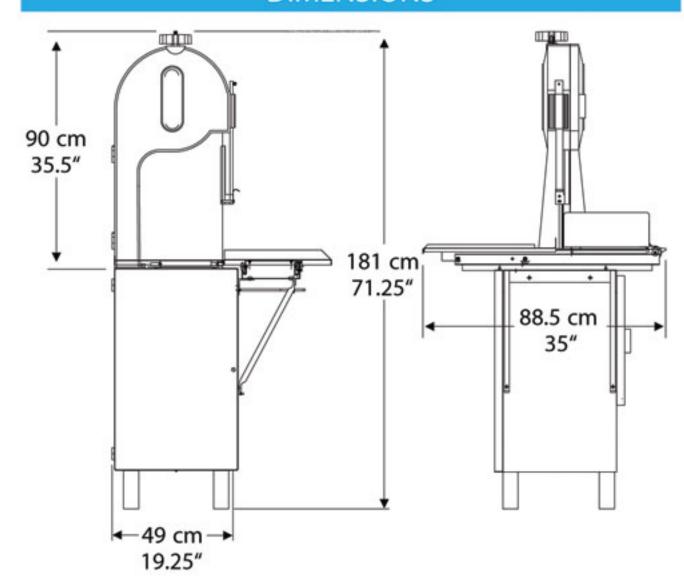







CONFORMS
CAN/CSA STD

