

RP-SS SERIES SPECIFICATIONS

Tested & Certified to PDI-G101


Model	Intermittent Flow GPM	Grease Capacity	Pipe Size	Top to Center of Inlet & Outlet A	Side to Center of Inlet & Outlet B	Bottom to Center of Inlet & Outlet C	Width D	Length E	Height F	Shipping Weight
RP-4-SS	4	8lb.	2"	3.5"	5.12"	7"	13"	18"	10.5"	40lb.
RP-7-SS	7	14lb.	2"	3.5"	5.12"	9.5"	13"	18"	13"	52lb.
RP-10-SS	10	20lb.	2"	3.5"	6.12"	9.5"	15"	20"	13"	55lb.
RP-15-SS	15	30lb.	2"	3.5"	7.12"	9.5"	17"	25"	13"	71lb.
RP-20-SS	20	40lb.	3"	3.5"	8"	9.5"	18.75"	27"	13"	80lb.
RP-25-SS	25	50lb.	3"	4.5"	8.62"	13.5"	20"	26"	18"	125lb.
RP-35-SS	35	70lb.	4"	4.5"	8.62"	17.5"	20"	28.5"	22"	130lb.
RP-50-SS	50	100lb.	4"	4.5"	10.62"	17.5"	24"	30"	22"	154lb.
RP-20-LO*-SS	20	40lb.	3"	3.5"	10.12"	6.5"	23"	32"	10"	130lb.
RP-35-LO*-SS	35	70lb.	4"	4.75"	10.12"	8.5"	23"	39"	13.25"	165lb.
RP-50-LO*-SS	50	100lb.	4"	5"	10.12"	11"	23"	52.25"	16"	210lb.
LARGE CAPACITY INTERCEPTORS										
RP-75*-SS	75	150lb.	4"	6"	12.62"	26"	28"	38"	32"	265lb.
RP-100*-SS	100	200lb.	4"	6"	15.62"	26"	34"	42"	32"	320lb.

Job Specification: Grease interceptors shall be Rockford Interceptors as manufactured by Rockford Sanitary Systems, Inc., Rockford, Illinois, and as noted on plans.

Interceptor Specifications: Furnish _____ Rockford Model **RP-SS** _____ all-welded stainless steel interceptors _____ g.p.m. intermittent flow, _____ lb. grease capacity, _____ " no-hub inlet and outlet connections, cast-iron flow control device, removable nonskid diamond treadplate cover for flush-with-floor installation, secured with stainless steel flat head screws and heavy-duty leakproof gasket.

* Built in accordance with PDI G-101.
All units standard with no hub connections.

Optional Features: Tapped inlet/outlet connections.

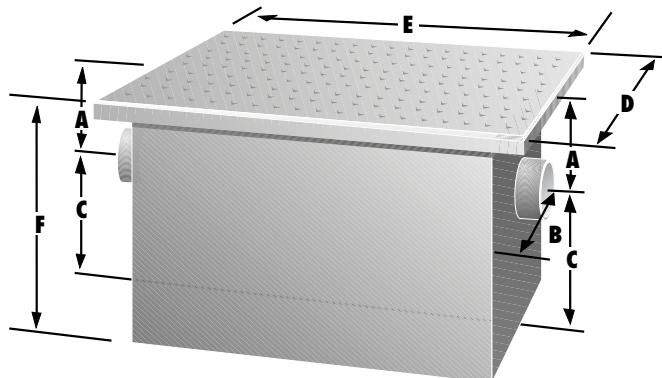

ROCKFORD SEPARATORS

5159 28th Avenue • Rockford, IL 61109 • 815.229.5077 • 800.747.5077 • Fax 815.229.5108

www.rkfdseparators.com

